



## Overview

- high measurement rate up to 100 kHz
- high precision
- very high robustness, IP 67
- insensitive to sunlight
- analog output or CAN Bus


The sensor OPTIMESS M operates according to the triangulation principle. Due to its high robustness, the sensor is particularly suitable for use on rail vehicles, e.g., for corrugation and ripple measurements as well as driving dynamics measurements on road vehicles where larger measurement ranges are required. Applications in the industrial sector in demanding environments are also part of the application range. This sensor is characterized by a high degree of independence of measurement accuracy on different surfaces and from ambient light. The processor integrated in the sensor processes the optical distance information and outputs it as an analog value or via the CAN bus.

Type OMS	8006	8009	8013
Measurement range [mm]	6	8	12
Standoff [mm]	70	70	70
Resolution [mm] *	0.0005	0.0008	0.001
Repeatability	≤ 0.03 %		
Linearity	≤ ± 0.06 %		
Max. measurement rate	100 kHz		
Dimensions	160 x 125 x 40 mm		
Weight	1.1 kg		

\* Measurement rate ≤ 10 kHz

## General specifications

OPTIMESS 1D		
Environmental conditions	Temperature range	-20°C bis 60°C (optionally extendable up to -40°C)
	Humidity	5% - 95%, non-condensing
	Protection type	IP67 (even when unplugged)
	Ambient light	> 100,000 lux (sunlight)
	Vibration	10-100Hz, 2mm
	Shock	50G / 6ms, EN 60068
	Environment, safety	EN 50155
	Certifications	CE
Laser	Laser protection class	1, 2, 3R, 3B
	Wave lengths	405nm – 850nm, depending on application
Connections	Supply voltage	10 - 32 V DC
	Power	2-4 W
	Output / APIs	0-5V / 0-10V / $\pm 5V$ / $\pm 10V$ / 0-20mA / 4-20mA / CAN Bus

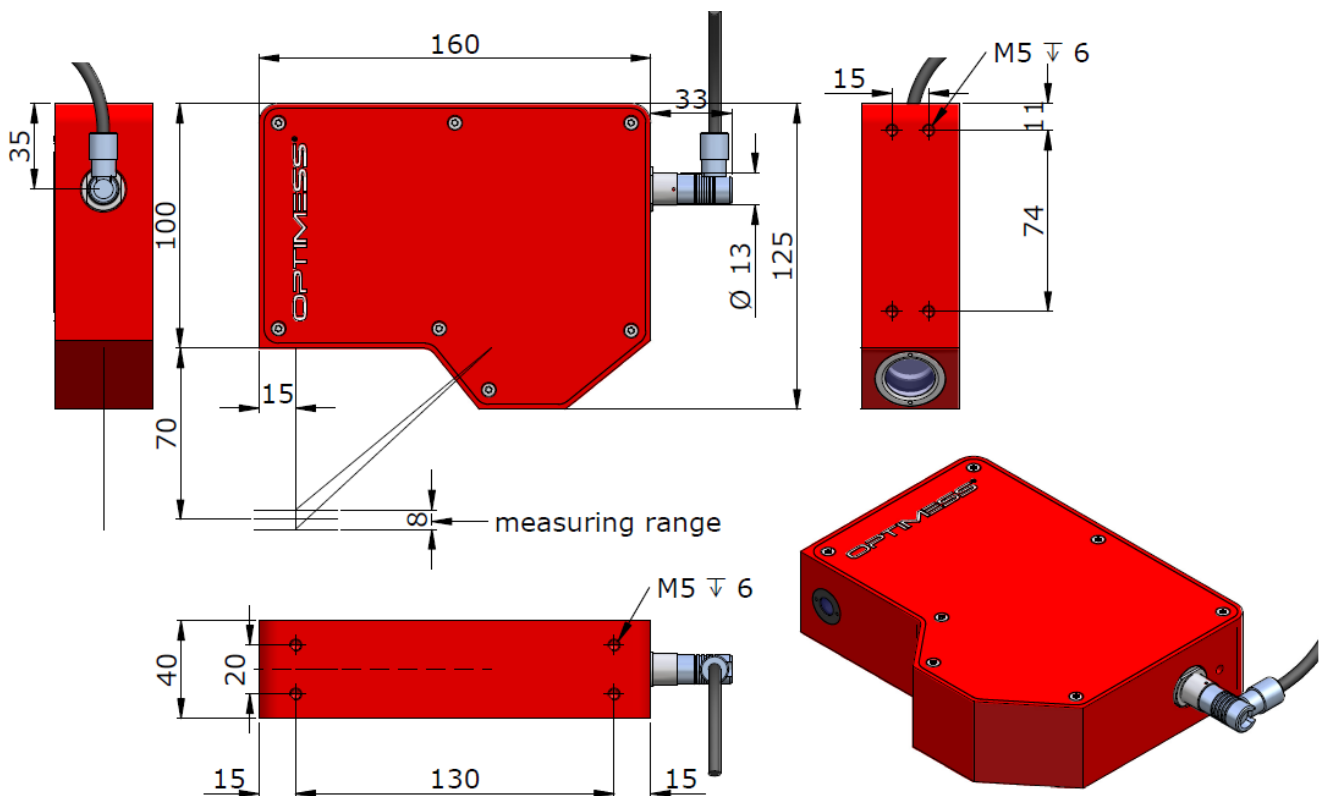

# ELAG

ELAG Elektronik AG  
 Stegackerstrasse 14  
 8409 Winterthur  
 Switzerland  
 Phone +41 52 577 50 77  
[info@elag.com](mailto:info@elag.com)  
[www.elag.com](http://www.elag.com)

